


MOTIP RAL Industrial Clear Coat

Ord.-no.: 07242

Technical Information

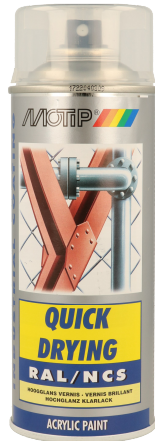

Fast drying clear coat for professional use with high filling properties, excellent adhesion and flow. To treat surfaces, treated and untreated, of wood, metal, aluminium, glass, stone and various types of plastic. The clear coat has a lasting gloss is scratch free and shock proof. MOTIP Industrial Clear Coat is resistant to weather influences and non-fading and UV resistant.

Quality & properties

- Fast drying
- Excellent coverage and filling property
- Excellent flow and lasting gloss
- Scratch free and shock proof
- Resistant to weather influences
- UV resistant and non-fading

Physical & chemical data

- Base: Acrylic resin
- Colourname: Transparent
- Degree of gloss: high gloss, >85 GU
- Efficiency: 400 ML – 1,25 - 1,75 m²
- Dry to touch: 10 - 20 min
- Dust dry: 5 - 10 min
- Completely dry: 120 min
- Overcoatable: 120 min
- Surfaces: wood, metal, aluminium, glass, stone and various types of plastic
- Minimum Working Temperature: 15 °C
- Maximum Working Temperature: 25 °C
- Vapour pressure: 8300/20 bar
- Flash point: n.a.
- Temperature Resistance: Transparent – 80 °C
- Content: 400 ML

How to use

- Before use, carefully read the directions on the packaging and act accordingly.
- The surface should be clean, dry and free of grease. Slightly sand the surface (grain 600).
- The surface should be clean, dry and free of grease. The aerosol should have room temperature. Best processing temperature 15 to 25°C. Before use, shake the aerosol for 2 minutes and spray a sample. Distance to the surface to be treated approximately 25 to 30 centimetre.
- Apply the clear lacquer in several thin layers. Before applying the next layer, again shake the aerosol.
- After use, clean the valve (turn aerosol upside down and press the nozzle for approximately 5 seconds).
- The drying time depends on the ambient temperature, the humidity of the air and the thickness of the lacquer applied.

Environmentally sound

European Aerosols is committed to apply formulations without restricted or critical ingredients and to achieve best possible performance. The caps and packagings are made of recyclable material.

Disposal

Only the completely emptied cans should be put into the recycling skip or appropriate container for reclaimable refuse. Cans which are not empty should be disposed off as "special refuse".

Marking/Labelling

All products made by European Aerosols comply with the actual labelling regulations according to Preparation Guideline 1999/45/EG. All aerosols correspond to TRGS 200 and TRG 300 as well as to aerosol guideline 75/324/EWG in the actually valid version.

For any further technical questions call our hotline +31 (0) 561 69 44 00 from Monday to Thursday from 9 h a.m. to 3 h p.m. or on Friday until 12 h p.m.

As of November 29, 2021 – This release replaces all eventually earlier issued versions.

